




High Performance PTFE & Silicone Coated Products

L13-Series PTFE Coated Fiberglass Fabric

Tear Resistant

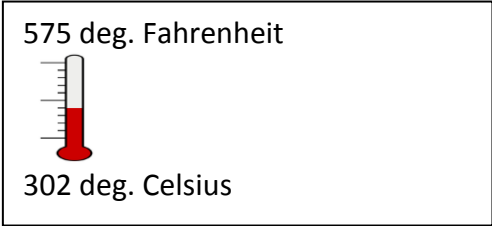

Product Data				
Product #	L13-3	L13-5	L13-6	L13-10
Base Fabric	1080	2116	2116	7628
Thickness (in)	0.003"	0.005"	0.0055"	0.009"
Weight (yds/lb)	0.25	0.40	0.50	0.85
Coating %	60	50	60	55
Tensile (warp)	70	120	120	220
Tear Strength (lbs)	50	75	75	150
Color	-Natural, Tan-			
<p><small>Elongation of fiberglass fabrics is less than 5%</small></p> <p><small>Operating Temperature: Min -200 to Max 550 deg. F, Intermittent to 600 deg. F.</small></p> <p><small>Thickness shown is nominal, however, most fabrics are +/- 10%.</small></p> <p><small>Widths are standard at 38". Other typical widths include 41", 50", 60", 82".</small></p> <p><small>Please consult the factory or W.F. Lake Corp. literature for available alternatives.</small></p> <p><small>Values are typical and should not be used for writing specifications.</small></p> <p><small>All data is subject to change without notice.</small></p>				

W.F. Lake Corp.
P.O. Box 4214
65 Park Road
Glens Falls, NY 12804
Customer Service: (800) 428-1162
Tel: (518) 798-9934
Fax: (518) 798-9936

www.wflake.com
info@wflake.com