




High Performance PTFE & Silicone Coated Products

## PTFE Coated S2 Glass Fiber Sewing Thread

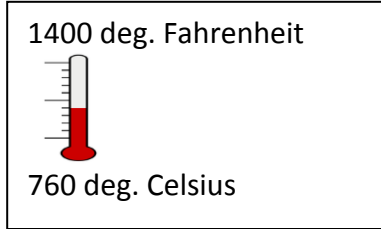

<b>Product Data</b>				
<b>Product #</b>	<b>SGT-12</b>	<b>SGT-18</b>	<b>SGT-24</b>	<b>SGT-27</b>
<b>Thread Style</b>	- Continuous Filament S2 Glass Fiber -			
<b>Coating Type</b>	-PTFE, Sintered-			
<b>Coating %</b>	15	15	15	15
<b>Yield (yds/lb)</b>	2950	1975	1475	920
<b>Tensile (lbs)</b>	20	25	29	40
<b>Diameter (nom)</b>	0.016"	0.019"	0.023"	0.031"xz
<b>Final Twist</b>	"Z"	"Z"	"Z"	"Z"
<b>Color</b>	-Natural, Tan-			
<b>Serving Package:</b> King Spool		<b>Operating Temp:</b> 1400 deg. F (760 deg. C)		
<b>Approx. Net Wt.:</b> 2 lb/spool (others available)		(PTFE Coating to 600 deg. F)		
Available with high speed silicone thread lubricant applied in line.				
<b>All values are typical and should not be used for writing specifications.</b>				

**W.F. Lake Corp.**  
 P.O. Box 4214  
 65 Park Road  
 Glens Falls, NY 12804  
 Customer Service: (800) 428-1162  
 Tel: (518) 798-9934  
 Fax: (518) 798-9936

[www.wflake.com](http://www.wflake.com)  
[info@wflake.com](mailto:info@wflake.com)