


## Natural, Uncoated Para-Aramid\* Thread

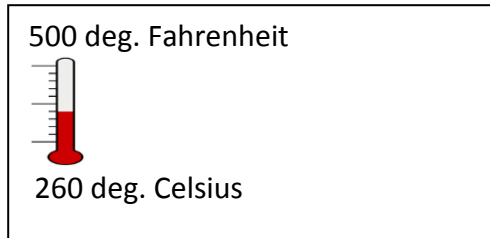

<b>Product Data</b>		
<b>Product #</b>	<b>KSP-90</b>	<b>KCF-70</b>
<b>Thread Style</b>	- Para-Aramid* Spun Fiber -	- Para-Aramid* Continuous Filament-
<b>Text Size</b>	90	70
<b>Coating Type</b>	-Uncoated-	
<b>Application</b>	-Medium Duty-	
<b>Yield (yds/lb)</b>	4700	6250
<b>Tensile (lbs)</b>	17	21
<b>Diameter (nom)</b>	0.012"	0.010"
<b>Final Twist</b>	-"Z"*-	
<b>Color</b>	-Natural (Yellow/Gold)-	
<b>Serving Package:</b> King Spool <b>Operating Temp:</b> 500 deg. F <b>Approx. Net Wt.:</b> 1 lb/spool (others available) Available with high speed silicone thread lubricant applied in line. <b>All values are typical and should not be used for writing specifications.</b> *Kevlar Reg. DuPont		

**W.F. Lake Corp.**

P.O. Box 4214  
65 Park Road  
Glens Falls, NY 12804  
Customer Service: (800) 428-1162  
Tel: (518) 798-9934  
Fax: (518) 798-9936

[www.wflake.com](http://www.wflake.com)  
[info@wflake.com](mailto:info@wflake.com)