




High Performance PTFE & Silicone Coated Products

PTFE Coated Round Braided Draw Cord

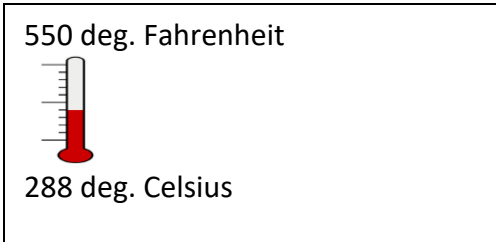

Product Data					
Product Series	TFDC-			TLDC-	E790-Series
Product #	-1875	-2187	-2500	-1875	-400 Kevlar*
Coating Type	PTFE, Sintered			PTFE, Unsintered**	Uncoated
Braid Type	E-Glass			E-Glass	Para-Aramid
Diameter (nom. in.)	0.14	0.19	0.24	0.14	0.14
Tensile (lbs. min)	200	250	300	200	450
Standard Colors	Black, Natural, Gray			Orange, White	Gold/Natural
Operating Temp	550 deg. F/287 deg. C				400F/204C
Std. Package Size	500 (-2187, -2500); 650; 1000; 1250 (orange only) foot spools				1,000 ft spools
Elongation: typically less than 5%		Operating Temp: See above			
Colors other than standard are available and may require minimum purchase quantity.				*Registered DuPont	
Spool Size is standard with 8.5" flange, 6.5" wide nominal.				** NASA Spec Top Coat	
All values are typical and should not be used for writing specifications.					

W.F. Lake Corp.
P.O. Box 4214
65 Park Road
Glens Falls, NY 12804
Customer Service: (800) 428-1162
Tel: (518) 798-9934
Fax: (518) 798-9936

www.wflake.com
info@wflake.com