


PTFE Coated S2 Glass Fiber Sewing Thread

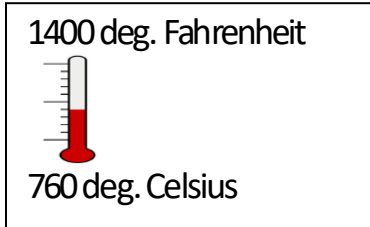

Product Data				
Product #	SGT-12	SGT-18	SGT-24	SGT-27
Thread Style	- Continuous Filament S2 Glass Fiber -			
Coating Type	-PTFE, Sintered-			
Coating %	15	15	15	15
Yield (yds/lb)	2950	1975	1475	920
Tensile (lbs)	20	25	29	40
Diameter (nom)	0.016"	0.019"	0.023"	0.031"xz
Final Twist	"Z"	"Z"	"Z"	"Z"
Color	-Natural, Tan-			
Serving Package: King Spool		Operating Temp: 1400 deg. F (760 deg. C)		
Approx. Net Wt.: 2 lb/spool (others available)		(PTFE Coating to 550 deg. F)		
Available with high speed silicone thread lubricant applied in line.				
All values are typical and should not be used for writing specifications.				

W.F. Lake Corp.

P.O. Box 4214
65 Park Road
Glens Falls, NY 12804
Customer Service: (800) 428-1162
Tel: (518) 798-9934
Fax: (518) 798-9936
www.wflake.com
info@wflake.com

Important Processing Information.

W.F. Lake Corp. PTFE coated fiberglass and aramid sewing threads are coated during manufacture with sizing's or finishes, including PTFE, to serve as aids in textile processing. When these products are heated above the continuous operating temperature of PTFE (550 degrees F, 287 degrees C), adequate ventilation and / or personal protective equipment must be used in accordance with site-specific exposure assessment as vapors can be emitted and may be hazardous if inhaled. See Safety Data Sheet or contact W.F. Lake Corp. for more information.